



# Technical Specifications

## General

Freq. range (FRX- 1 U2)	440 - 480MHz
Freq. range (FRX-1 U1)	400 - 440MHz
Freq. range (FRX-1 V2)	146 - 174MHz
Protection rating	IP66
Area classification	Zone 1 & 2
Channel capacity	5
Channel spacing	12.5KHz / 20KHz / 25KHz
Operating Voltage	12v DC
Temperature range	-30°C to + 60°C
Battery	Li-ion 6600 mAh 14.8V
Current drain:	
Standby	98mA
Transmit/Receive	610mA
Duty cycle (40/60)	20 Hours
Dimensions:	270mm x 310mm x 185mm
Weight:	14kg

## Transmitter


RF power output	11C = 1 W (VHF) / (UHF) 11B = 3.5 W (VHF) / (UHF) 11A = 4 W (VHF) / (UHF)
Audio sensitivity	6 - mVrms @ 60% peek
Modulation	G3E

## Receiver

Sensitivity	12 db SINAD UHF: < 0.35 µV - 116 dBm VHF: < 0.28 µV - 118 dBm
-------------	---

## Supplied Accessories

Charger	Rapid intelligent
Transport Case	Waterproof flight case
User manual	

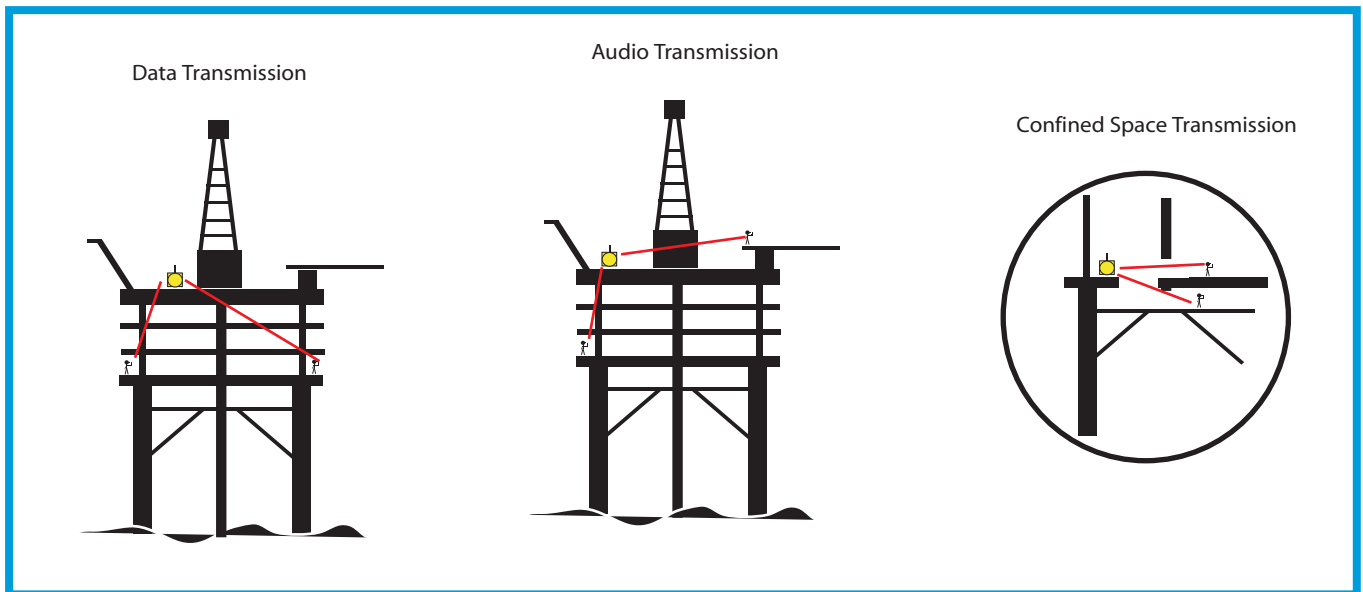

Fern Communications Ltd  
Balgownie Technology Centre  
Balgownie Drive  
Aberdeen  
AB22 8GW  
UK

Tel: +44 (0)1224 418 092  
Fax: +44 (0)1502 440 617  
Email:sales@ferncom.com

www.ferncom.com

